


Cross extension joints with strainer

十字濾管

This equipment is suitable for installation in front of various hydraulic automatic valves (such as pressure reducing valves, pressure relief valves, pressure sustaining valves, remote control float valves, etc.), providing sedimentation and coarse filtration to prevent debris from clogging the valve body. It also features a pull rod telescopic joint among its functions.

本設備適合裝置於各類水力自動閥 (如減壓, 洩壓, 持壓, 遙控浮球閥等) 之閥前, 以兼具沉澱、粗濾以防止雜物淤塞於閥體及具有拉桿伸縮接頭等功能。

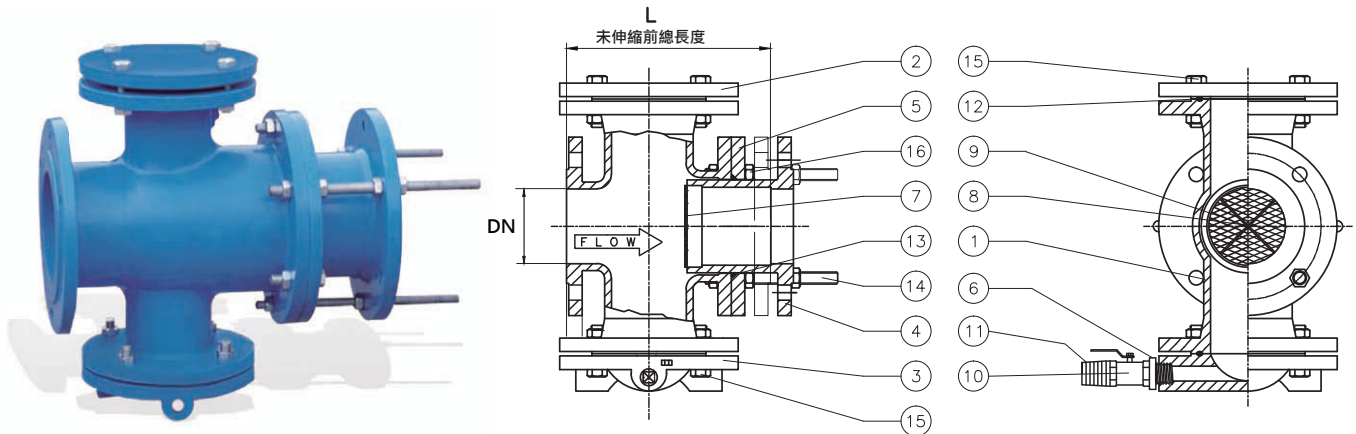

PARTS LIST & MATERIAL 構造材質

項次	主要組件	材質
01	本體	延性鑄鐵 FCD450
02	頂蓋	延性鑄鐵 FCD450
03	底蓋	延性鑄鐵 FCD450
04	伸縮管	延性鑄鐵 FCD450
05	止水壓環	延性鑄鐵 FCD450
06	排泥軟管接頭	不銹鋼 SUS304
07	濾網	不銹鋼 SUS304
08	濾網支撐板	不銹鋼 SUS304
09	濾網固定線	不銹鋼 SUS304
10	排泥閥	青銅 BC6
11	排泥管	不銹鋼 SUS304
12	盲蓋止水膠圈	高級橡膠N.B.R
13	伸縮管止水膠圈	高級橡膠N.B.R
14	伸縮拉桿	鍍鋅螺桿
15	頂底蓋螺絲連帽	鍍鋅螺柱
16	壓環螺絲連帽	鍍鋅螺柱

DIMENSION 尺寸表

Unit : mm

DIM. SIZE	DN	L	Contraction	Expansion
			收縮量 min	伸長量 min
50	50	260	20	20
75	75	280	20	20
100	100	300	20	20
150	150	425	20	20
200	200	500	40	40
250	250	650	80	80
300	300	750	125	125
350	350	875	150	150
400	400	1000	160	160
450	450	1125	175	175
500	500	1250	175	175
600	600	1500	175	175
700	700	1750	175	175
750	750	1750	175	175
800	800	2000	175	175
900	900	2250	175	175
1000	1000	2500	175	175
1200	1200	2500	175	175
1350	1350	2500	175	175
1500	1500	2500	175	175
1800	1800	2500	175	175
2000	2000	2500	200	200

